



Stop Logs KD05.7



Stop Logs KD05.7

Stop Logs KD 05.7 are used for shut off or level control, e.g. in channels or as protection against flooding. Stop Logs can also be used for servicing, switchover of structures or where the flow should have a specific direction. The possibilities are many.

Aluminium profiles

As standard Stop Logs type KD 05.7 consist of sea water resistant aluminium profiles and a frame made from stainless steel.

Aluminium profiles are available in 4 standard types which are all dimensioned according to strength, the type is determined based on (width x water level). The profiles are designed (key/slot) to ensure a stable and tight seal between the profiles. The sealing between profiles is achieved with a rubber packing that is fixed to the top of aluminium profiles.



Standard aluminium profiles.

Aluminium profiles can either be supplied individually or as one or more finish-assembled sections, in case of several sections they are connected with fittings that are easy to dismantle/fit. Sectional Stop Logs are especially handy for channels that are deep and have a high water level where the fitting and dismantling of individual pieces is a difficult and almost impossible task.



Lifting tool.

By using sectional Stop Logs and our specially designed lifting

yoke this task is very simple.



Sectional Stop Logs.



Stop Logs with individual profiles.

For lifting individual profiles 1 set of handles is supplied, profiles have slits for fitting handles.

For lowering and lifting sections KD standard lifting yoke is used which is especially adapted to lifting attachments on sections. The unique system is designed so that depending on whether the lifting tools are used for lowering or lifting, the lifting yoke will automatically release the sections when lowering or grab the sections automatically when lifting them out.

You must use a crane, manual or electro chain hoists or similar when using KD standard lifting tool.

When choosing sectional Stop Logs there may be a locking device fitted to the top of the frame which is used for temporary dismantling of the sections.



Locking device which can be folded under walking area.



Locking device.

This locking device is especially used if Stop Logs sections are very tall and where the lifting height is minimal and the sectional Stop Logs cannot be lifted.



Aluminium safety arrangement.

In order to ensure that profiles or sections remain closed a standard KD aluminium safety arrangement can be used. This is placed inside the frames during operation.

Frames

Frames are shaped as a U-profile and are the standard for fitting in recesses or on walls, other types are available according to specific customer requests.



Frame design.

Stop Logs KD 05.7 for mounting in channel have a 3-sided seal as standard, it makes it tight at the sides and the bottom. Fitted as standard in recess adapted frame dimension. Can also be fitted directly to sides and bottom, however this requires extra angle profiles and seals between frame and wall/bottom with SIKA.


Stop Logs KD 05.7 for fitting to wall and in front of hole have 4-sided seals as standard. Seal between frame and wall/bottom with SIKA. Can only be used when the flow pushes the aluminium profiles towards the sealing (against the wall).

In the frame there is a resistant rubber sealing with double adhesive function, the sealing is developed by KD Maskinfabrik A/S based on use in Penstocks KD 05.1/05.2 and Stop Log. The unique design ensures tightness in both flow directions. As standard slide rails are made from PEHD.



Slide rail and rubber packing.

Stop Logs KD 05.7 can be modified based on specific customer requirements like material quality, sealing class, fitting requirements, etc.

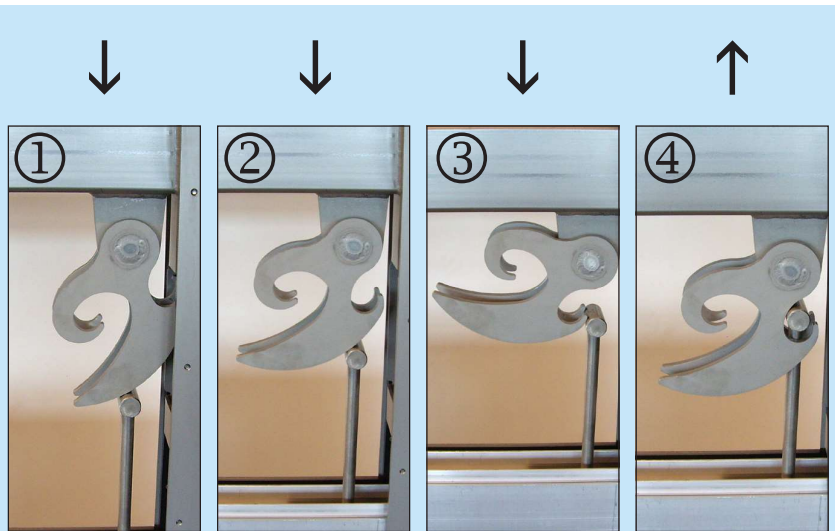


Lifting Stop Log:

Picture 1: Lifting tool is lowered and hook hits lifting attachments.

Picture 2+3: Lifting tool is still being lowered and hook is approaching contact.

Picture 4: Hook is in contact and ready for lifting.

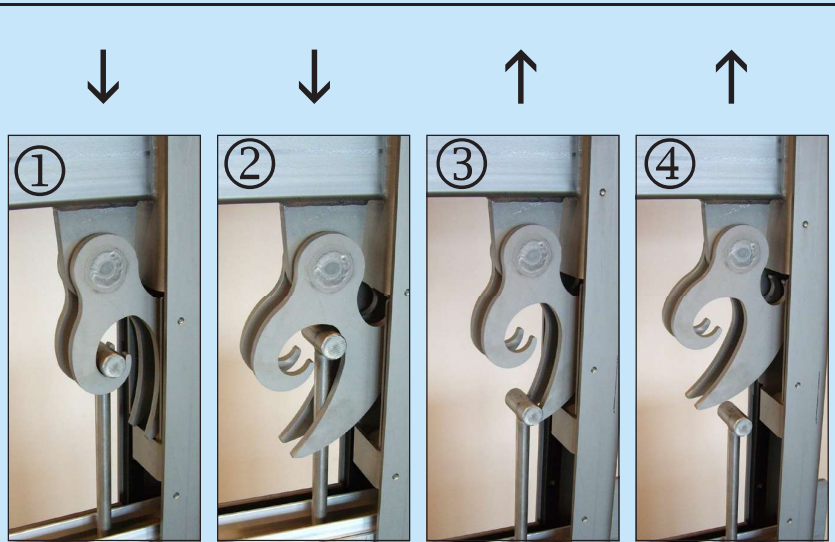

Lowering Stop Log:

Picture 1: Lifting tool is lowered with Stop Log and has reached bottom position.

Picture 2: Lifting tool is lowered further, hook is almost released.

Picture 3+4: Hook is released and Lifting tool can be lifted.